



**ENERGY
DIVISION**
INTERNATIONAL

20
20

**SAFETY
FOOTWEAR
CATALOG**

Rigmaster
Style 95553





**BUILT ON A TRADITION OF
CRAFTSMANSHIP AND INNOVATION,
THE TIMBERLAND PRO® BRAND
HELPS YOU CONQUER YOUR WORK
DAY. WE KNOW THAT WHAT YOU
WEAR IS AS IMPORTANT AS THE
TOOLS YOU USE. WE ALSO KNOW
THAT WHAT'S NEEDED TO GET THE
JOB DONE IS ALWAYS CHANGING,
SO OUR FOOTWEAR IS ALWAYS
EVOLVING, ENGINEERED WITH
TECHNOLOGIES TO PROVIDE
THE VERY BEST IN COMFORT,
DURABILITY AND PERFORMANCE—
ALL DAY LONG.**

TABLE OF CONTENTS

TIMBERLAND PRO TERRITORIES MAP.....	6	RIGMASTER	28
DRIVETRAIN.....	8	LACE RIGGER.....	29
BRANSTON	10	HYPERCHARGE.....	31
GLADSTONE.....	11	VALOR™	32
REAXION.....	13		
DRIVETRAIN.....	15	TECHNOLOGY KEY	34
WILDCARD.....	16	SAFETY TOES	36
RACHET	17	FACTORY DIRECT CALENDAR.....	37
BOSSHOG	19	DISTRIBUTOR INFORMATION	38
WORK SUMMIT.....	21	INDEX	39
BOONDOCK.....	23		
MAGNUS.....	24		
CAPROCK	25		
TRUE GRIT.....	27		



ASTM PROTECTION

Timberland PRO is committed to passing and exceeding ASTM F2413 safety standard specifications for performance requirements. Through our relentless testing, and dedication to superior design and construction, we deliver the ultimate comfort, durability and protection expected from a Timberland PRO® product.



CSA PROTECTION

Timberland PRO builds footwear that meets CAN/CSA-Z195 Canadian Safety Association (CSA) standards for toe protection, puncture resistance and resistance to electric shock.

*Reaxion
Style A21TQ*





Boondock
Style A1XCH

TIMBERLAND PRO GLOBAL TERRITORIES



MIDDLE EAST & AFRICA

OMAN
ALGERIA
LIBYA
QATAR
LIBYA
BAHRAIN
UNITED ARAB EMIRATES
EGYPT
NIGERIA
KUWAIT
SAUDI ARABIA
YEMEN

EUROPE

CANADA

FORMER SOVIET REPUBLICS (CIS COUNTRIES)

KAZAKHSTAN

ASIA PACIFIC

AUSTRALIA
PHILIPPINES
MALAYSIA
HONG KONG
MACAU



TIMBERLAND PRO CUSTOMER SERVICE

PHONE 1-855-253-3261

FAX 1-855-218-9585

WEB [HTTP://WWW.TIMBERLAND.COM/
TIMBERLANDPRO/INTERNATIONAL.HTML](http://WWW.TIMBERLAND.COM/TIMBERLANDPRO/INTERNATIONAL.HTML)

STYLE CODE KEY


TBØ | A110Ø | 21Ø

PRO
CODE

SKU

COLOR
CODE

NOTE: SKUs may contain the letter "O" and/or a Zero. Zeros are represented by a "Ø".

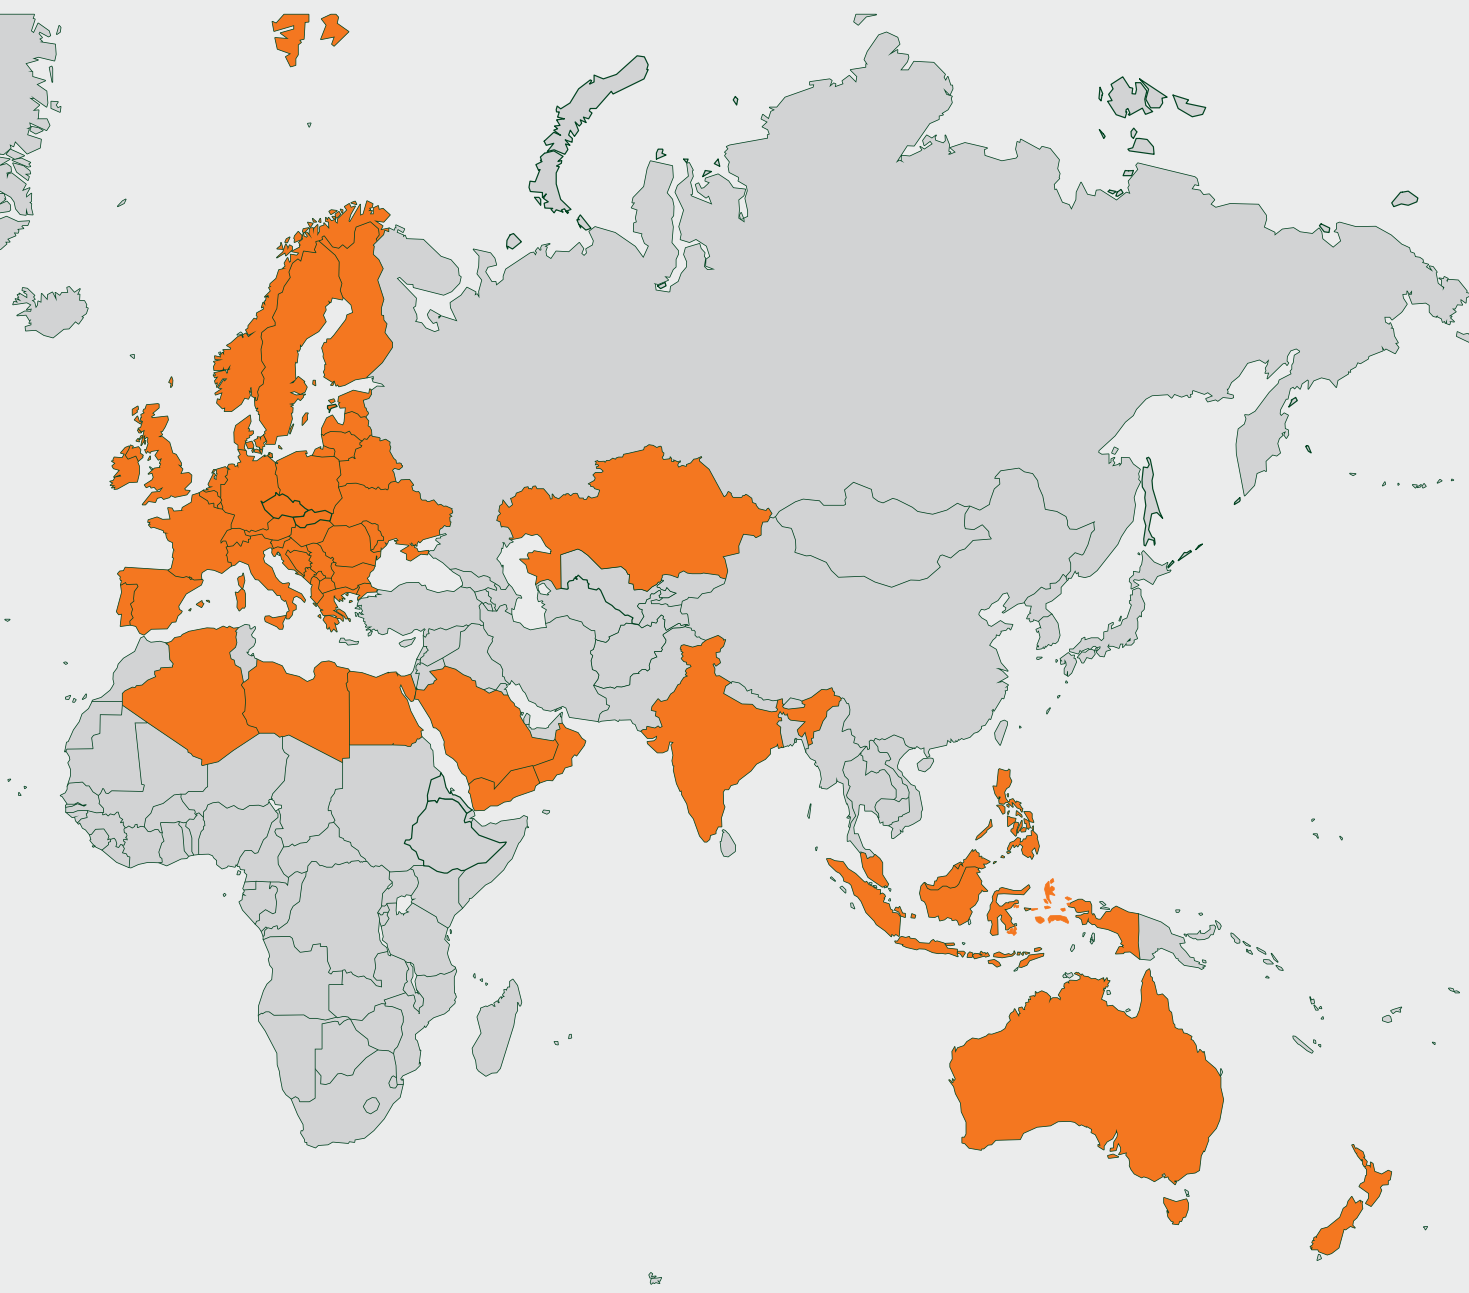


DRIVETRAIN CASUAL

- Premium full-grain leather
- Composite safety toe powered by CarbonShield™ technology
- Metal and mutilation free
- Cement construction for flexibility
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Non-Metallic puncture-resistant plate
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Fiberglass shank for structural support




- A. Composite Safety Toe Powered by CarbonShield™ Technology
- B. Anti-Fatigue Technology PU footbed
- C. Non-Metallic Puncture-Resistant Plate
- D. Non-Metallic Shank
- E. Lightweight, Cushioning EVA Midsole

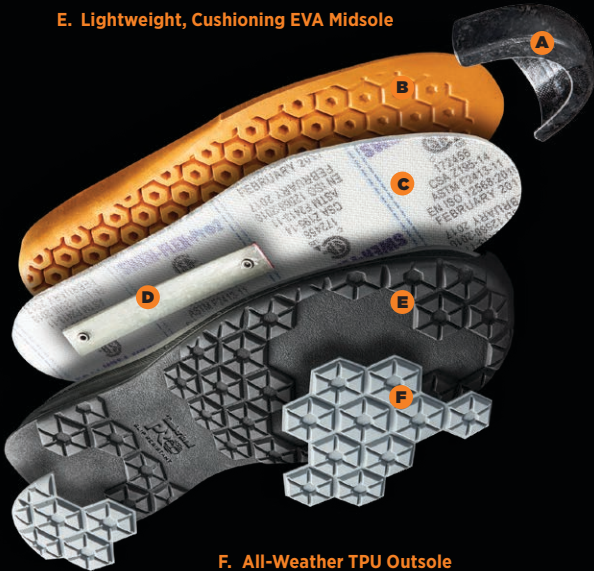

F. All-Weather TPU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- Abrasion resistant
- Non-marking

CSA Z195-14 SLIP TEST RATINGS

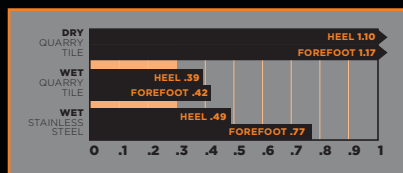

TEST REPORT: CHT0273338/1829
OUTSOLE: PRO449 TEST LAB: 12A10

NEW
1/17/20



TB0 A21WK 001
COMPOSITE SAFETY TOE
Black
7-11,12,13,14,15W

NEW
1/17/20



TB0 A21XT 001
COMPOSITE SAFETY TOE
Black
7-11,12,13,14,15W

NEW
1/17/20



TB0 A21X7 214
COMPOSITE SAFETY TOE
Brown
7-11,12,13,14,15W

MORE ENERGY PER FOOT.

**ANTI-FATIGUE TECHNOLOGY COMFORT
SYSTEM ABSORBS SHOCK WHILE
RETURNING ENERGY BACK TO THE FOOT IN
KEY ZONES FOR ALL-DAY COMFORT.**

Contoured insole provides maximum support
at key pressure points and impact zones.

Cone design results in less material
meaning lighter footwear.

Innovative design minimizes impact to
maximize support and reduce fatigue.



BRANSTON

- Premium full-grain leather
- Alloy safety toe
- Cement construction for flexibility
- Fiberglass shank for structural support
- Mutilation-free upper
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Metallic puncture-resistant plate



ALLOY
SAFETY TOE



ELECTRO STATIC
DISSIPATIVE



PUNCTURE
RESISTANT



PU OUTSOLE



MUTILATION
FREE



ANTIMICROBIAL
ODOR CONTROL



ANTI-FATIGUE
TECHNOLOGY™

Dual-Density PU Outsole



- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking



TB0 A11WP 001

ALLOY SAFETY TOE OXFORD ESD

Black Oiled Nubuck Leather
5-12,13,14,15W



TB0 A11XC 001

**ALLOY SAFETY TOE MOC TOE
SLIP-ON ESD**

Black Oiled Nubuck Leather
5-12,13,14,15W



TB0 92647 001

**ALLOY SAFETY TOE MOC TOE
SLIP-ON ESD**

Black Full-Grain Leather
7-12,13,14,15M/W

GLADSTONE

- Premium full-grain leather
- Steel safety toe
- Cement construction for flexibility
- Fiberglass shank for structural support
- Mutilation-free upper
- Goodyear® SafeGrip™ slip-resistant rubber sole for enhanced traction
- Anti-Fatigue Technology for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control



TB0 86509 214
STEEL SAFETY TOE ESD
 Brown Full-Grain Leather
 7-12,13,14,15M/W



NEW
 1/17/20



TB0 A22WR 001
STEEL SAFETY TOE ESD
 Black Full-Grain Leather
 7-12,13,14,15M/W



TB0 85590 214
STEEL SAFETY TOE ESD
 Brown Full-Grain Leather
 7-12,13,14,15M/W

**Goodyear® Rubber Outsole
 with PU Midsole**



- Oil-resistant
- Slip resistant
- Abrasion resistant
- Non-marking

TIMBERLAND PRO® REAXION WITH AEROCORE® ENERGY SYSTEM

**WORK BOOT
PROTECTION**

**FUSED
WITH**

**ATHLETIC SHOE
PERFORMANCE**



DURABLE
RIPSTOP UPPER

ANTI-FATIGUE
TECHNOLOGY FOOTBED

FIBERGLASS
SHANK

TPU WRAPPED
AEROCORE™
MIDSOLE

TPU OUTSOLE

Rubber outsole also available



aerocore™
ENERGY SYSTEM >>

ENERGY

TPU-wrapped midsole delivers maximum energy return while resisting rips, abrasions and scuffs.

COMFORT

Lightweight, streamlined Anti-Fatigue footbed absorbs shock for all-day support and comfort.

GRIP

Non-marking TPU compound and versatile lug design grips surfaces—from slick floors to uneven terrain.

REAXION_{LOW}

- Abrasion-resistant ripstop nylon for lightweight and breathable performance
- Composite safety toe powered by CarbonShield™ technology
- TPU Wrapped Aerocore™ midsole delivers maximum energy return while resisting rips abrasions and scuffs
- Metal and mutilation free
- Cement construction for flexibility
- Non-Metallic puncture-resistant plate
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Fiberglass shank for structural support
- Lightweight All Weather TPU outsole with anatomically positioned flex grooves



aerocore™
ENERGY SYSTEM >>



NEW
1/17/20



TB0 A21T4 001
COMPOSITE SAFETY TOE SD+
Black/Yellow
7-11,12,13,14,15W



NEW
1/17/20



TB0 A21TQ 001
COMPOSITE SAFETY TOE SD+
Black/Orange
7-11,12,13,14,15W


- A. Composite Safety Toe Powered by CarbonShield™ Technology
- B. Anti-Fatigue Technology PU footbed
- C. Non-Metallic Puncture-Resistant Plate
- D. Non-Metallic Shank
- E. TPU wrapped Aerocore™ Midsole



F. All-Weather TPU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- Abrasion resistant
- Non-marking

CSA Z195-14 SLIP TEST RATINGS

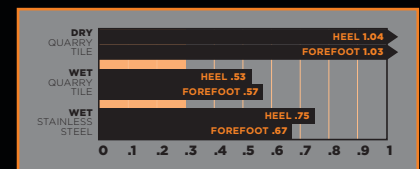

TEST REPORT: CHT0285207 / 1920
OUTSOLE: PRO512 TEST LAB: UKAS 0248


REAXION MID

- Full-grain leather
- Composite safety toe powered by CarbonShield™ technology
- TPU Wrapped Aerocore™ midsole delivers maximum energy return while resisting rips abrasions and scuffs
- Metal and mutilation free
- Cement construction for flexibility
- Fiberglass shank for structural support
- Non-Metallic puncture-resistant plate
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Luggy Rubber Outsole with anatomically positioned flex grooves
- Nylon top speed hooks



aerocore™
ENERGY SYSTEM >>

- A. Composite Safety Toe Powered by CarbonShield™ Technology
- B. Anti-Fatigue Technology PU footbed
- C. Non-Metallic Puncture-Resistant Plate
- D. Non-Metallic Shank
- E. TPU wrapped Aerocore™ Midsole

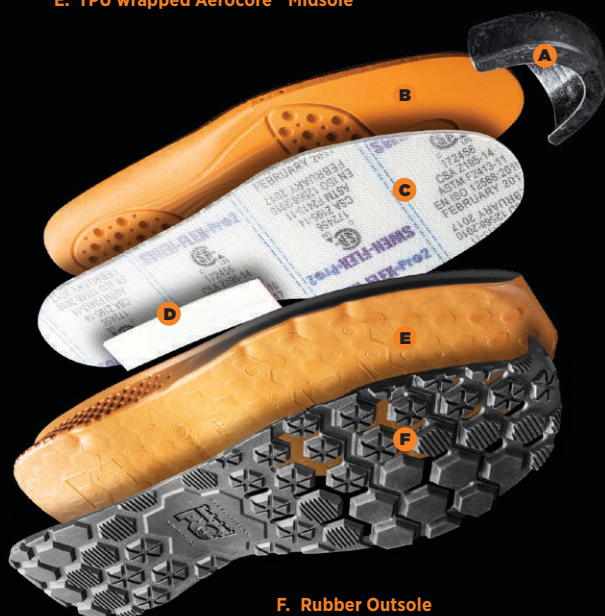

F. Rubber Outsole

- Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Oil-resistant
- Slip resistant
- Abrasion resistant
- Non-marking




NEW
1/17/20



TB0 A21R8 001
COMPOSITE SAFETY TOE
WATERPROOF
Black/Gray
7-12,13,14,15W

CSA Z195-14 SLIP TEST RATINGS

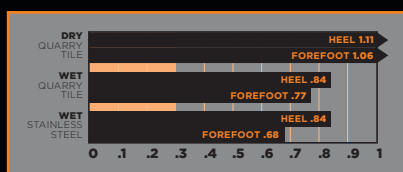

TEST REPORT: CHT0285210 / 1920
OUTSOLE: PRO513 TEST LAB: UKAS 0248

DRIVETRAIN[™] ATHLETIC

- Abrasion-resistant ripstop nylon or mesh upper for lightweight and breathable performance
- Composite safety toe powered by CarbonShield™ technology
- TPU toe overlay for enhanced durability and protection
- Metal and mutilation free
- Cement construction for flexibility
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Fiberglass shank for structural support




TB0A1ZW2 001
COMPOSITE SAFETY TOE ESD
Black Ripstop Nylon Upper
7-12,13,14,15M/W



TB0A1WXC 001
COMPOSITE SAFETY TOE ESD
Black Ripstop Nylon Upper
with Grey
7-12,13,14,15M/W


- A. Composite Safety Toe Powered by CarbonShield™ Technology**
- B. Anti-Fatigue Technology PU footbed**
- C. Non-Metallic Shank**
- D. Lightweight, Cushioning EVA Midsole**

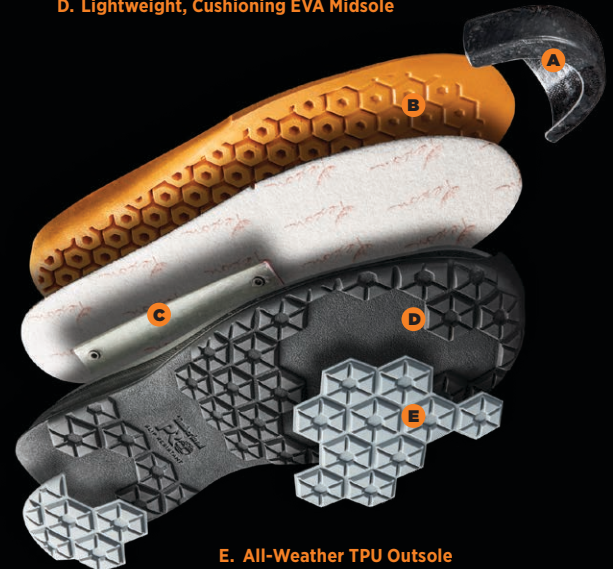

E. All-Weather TPU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- Abrasion resistant
- Non-marking

ASTM SLIP TEST RATINGS

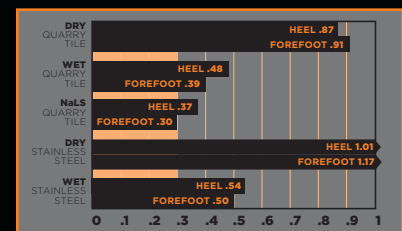

TEST REPORT: CHT0262963
OUTSOLE: PRO449 TEST LAB: 12A10

WILDCARD

- Composite safety toe
- Premium synthetic upper
- Thermoplastic shank
- Padded top collar for comfort
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Non-metallic puncture-resistant plate



COMPOSITE
SAFETY TOE



ELECTRO STATIC
DISSIPATIVE



PUNCTURE
RESISTANT



ANTIMICROBIAL
ODOR CONTROL



Rubber Outsole



- Low profile for high surface contact
- Oil-resistant
- Slip resistant
- Abrasion resistant



TB0 A1GQQ 001

COMPOSITE SAFETY TOE ESD

Black Synthetic

4,5,6,6.5,7,8,9,10,11,12,13M



TB0 A1GSW 001

COMPOSITE SAFETY TOE ESD

Black Synthetic

3.5-12,13,14,15M

RATCHET

- Leather upper for comfort and abrasion resistance
- Steel safety toe
- Molded Timberland PRO® rubber toe
- Cement construction for flexibility
- Metallic puncture-resistant plate
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control



STEEL SAFETY TOE



PUNCTURE RESISTANT



18KV ELECTRICAL HAZARD



RUBBER OUTSOLE



ANTIMICROBIAL ODOR CONTROL



AVAILABLE IN
SMALL SIZES



TB0 39077 210

STEEL SAFETY TOE

Chocolate Oiled
Nubuck Leather
3.5-12,13,14,15M/W

A. Steel Safety Toe

B. Contoured, Breathable PU Footbed

C. Steel Shank

D. Metallic Puncture-Resistant Plate


E. Lightweight, Cushioning EVA Midsole



E. Rubber Outsole

- Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking

CSA Z195-14 SLIP TEST RATINGS

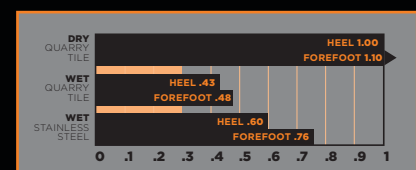

TEST REPORT: FWT0201744

OUTSOLE: OP31 TEST LAB: 12A10

TIMBERLAND PRO® CARBONSHIELD™ TECHNOLOGY

LIGHT IN WEIGHT. NOT IN PROTECTION.

TIMBERLAND PRO® CARBONSHIELD™

TECHNOLOGY adds strength and subtracts weight with the help of nanotechnology. It provides a better fit, lighter overall weight, and unmatched protection. It's the future of safety and it enhances the strength of our composite safety toe in the new Timberland PRO® Bosshog work boot.



BOSSHOG

- Premium full-grain waterproof leather with a waterproof membrane
- Composite safety toe powered by CarbonShield™ Technology
- Non-metallic puncture plate
- Cement construction for flexibility
- Padded top collar for comfort

- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odour control
- Fiberglass shank for structural support
- Mark II oily wet #3 on American Olean tile at .56



TB0 A1WSB 214
6" COMPOSITE SAFETY TOE
WATERPROOF
 Brown Full-Grain Leather
 w/ Red
 5-12,13,14,15M/W



TB0 A1XJP 001
6" COMPOSITE SAFETY TOE
WATERPROOF
 Black Full-Grain Leather
 w/ Grey
 5-12,13,14,15M/W




TB0 A1XK1 214
6" COMPOSITE SAFETY TOE
WATERPROOF
 Brown Distressed Full-Grain Leather
 w/ Orange
 5-12,13,14,15M/W

- A. Composite Safety Toe Powered by CarbonShield™ Technology
- B. Anti-Fatigue Technology PU footbed
- C. Non-Metallic Shank
- D. Non-Metallic Puncture-Resistant Plate
- E. Lightweight, Cushioning EVA Midsole



- F. Rubber Outsole
 - Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
 - Oil resistant
 - Slip resistant
 - Abrasion resistant
 - Non marking

CSA Z195-14 SLIP TEST RATINGS

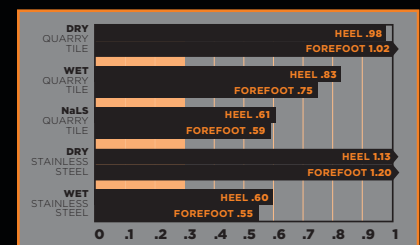

TEST REPORT: CHT0269404
 OUTSOLE: PRO495 TEST LAB: 12A10

Timberland **PRO** 

PREPARE TO BE **MOVED.**

The Step Propel™ footbed is made of thousands of fused beads that absorb shock and propel you through your day.



**STEP
PROPEL™**

TIMBERLAND PRO® STEP PROPEL™ ENERGY RETURN TECHNOLOGY

As you work, thousands of small beads compress and rebound to provide superior cushioning and energy return to propel you through your day. The lightweight and sleek design of the Step Propel™ Technology footbed stores the energy and releases it back to your foot with every step. You'll find it inside the new **Work Summit boot** and you'll feel it working the moment you step in.

WORK SUMMIT

- Premium waterproof leather with a waterproof membrane
- Composite safety toe powered by CarbonShield™ Technology
- Step Propel footbed for shock absorption and energy return
- Cement construction for flexibility
- Non-metallic puncture plate
- Padded top collar for comfort
- Metal and mutilation free
- Breathable and moisture-wicking lining with anti-microbial treatment for odour control
- Fiberglass shank for structural support



NEW
7/17/20



TB0 A25DK 214
6" COMPOSITE SAFETY TOE
WATERPROOF
Mocha Brown Leather
7-11,12,13,14,15W



NEW
7/17/20



TB0 A24G7 001
6" COMPOSITE SAFETY TOE
WATERPROOF
Black Leather
7-11,12,13,14,15W



NEW
7/17/20



TB0 A24H5 001
8" COMPOSITE SAFETY TOE
WATERPROOF INSULATED
Black Leather
7-11,12,13,14,15W



A. Composite Safety Toe Powered by CarbonShield™ Technology

B. Step Propel Technology eTPU footbed

C. Non-Metallic Shank


D. Non-Metallic Puncture-Resistant Plate

E. Lightweight, Cushioning EVA Midsole

F. All-Weather TPU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- Abrasion resistant
- Non-marking

CSA Z195-14 SLIP TEST RATINGS

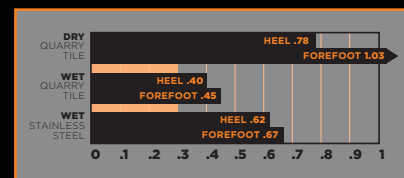

TEST REPORT: CHT0288465
OUTSOLE: PRO531 TEST LAB: 12A10

TAKE SHELTER INSIDE.

TIMBERLAND PRO® BOONDOCK WORK BOOT is equipped with waterproof leather, a waterproof membrane and Thermolite® insulation to keep you warm and dry, no matter how frigid the weather gets.



- A. ANTI-FATIGUE TECHNOLOGY FOOTBED** for all-day comfort and energy return
- B. WATERPROOF LEATHER AND BREATHABLE MEMBRANE** keep your feet dry and comfortable
- C. EFFICIENT FLAME-LAMINATED THERMOLITE® INSULATION** for warmth without bulk (also available without insulation)
- D. GOODYEAR WELT/CEMENT HEEL CONSTRUCTION** provides stability and forefoot flexibility

- E. VIBRAM® FIRE&ICE™ OUTSOLE** for maximum protection on cold surfaces
- F. TIMBERLAND PRO® RUBBER TOE PROTECTOR** for increased abrasion resistance and durability
- G. COMPOSITE SAFETY TOE** shaped on TITAN® last for non-metallic protection and a roomier fit

BOONDOCK

- Molded Timberland PRO® rubber toe protector
- Composite safety toe
- Combination 3/4-Goodyear welt construction
- Dual-purpose top hardware
- Mesh lining with anti-microbial treatment for odour control
- Non-metallic shank for structural support

- Dynamic Anti-Fatigue Technology polyurethane footbed
- Non-metallic puncture-resistant plate
- Unique finger-grip pull-on



TB0 89646 214
8" COMPOSITE SAFETY
TOE WATERPROOF
 Brown Full-Grain Leather
 7-12,13,14,15W



TB0 A131D 001
8" COMPOSITE SAFETY TOE
WATERPROOF INSULATED UNLINED
 Black Full-Grain Leather
 7-12,13,14,15W




- A. Composite Safety Toe
- B. Anti-Fatigue Technology PU Footbed
- C. Non-Metallic Shank
- D. Non-Metallic Puncture-Resistant Plate
- E. Lightweight, Cushioning PU Midsole

F. Vibram® Fire&Ice™ Rubber Outsole

- Low temperature formulation maximizes traction on cold surfaces
- Deep lugs for mud and snow traction
- Oil-resistant
- Slip resistant
- Abrasion resistant
- Non-marking

CSA Z195-14 SLIP TEST RATINGS

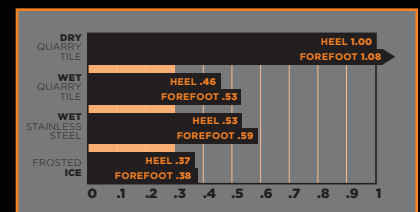

TEST REPORT: FWT0209034A/1244/Z
 OUTSOLE: PRO309 TEST LAB: 0248

MAGNUS

- Rugged nubuck leather
- Steel safety toe
- Goodyear Welt Cast-Bond™ construction for a durable mechanical and chemical bond
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Steel shank for structural support
- Non-metallic puncture-resistant plate
- Anti-Fatigue Technology for shock absorption and energy return



A. Steel Safety Toe

B. Anti-Fatigue Technology PU Footbed

C. Steel Shank

D. Non-Metallic Puncture-Resistant Plate


E. Lightweight, Cushioning PU Midsole



F. PU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Ladder-Lock™ Outsole Radius

ASTM SLIP TEST RATINGS

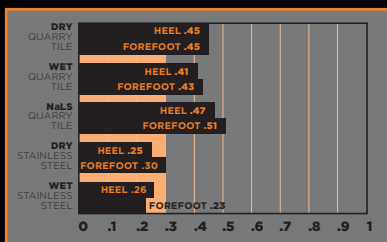

TEST REPORT: CHT0212788R3

OUTSOLE: PRO51M TEST LAB: 12A10



TB0 87520 214

6" STEEL SAFETY TOE

Brown Full-Grain Leather
5-12,13,14,15W



TB0 A25YM 214

8" STEEL SAFETY TOE

Brown Smooth Leather
5-12,13,14,15W



TB0 A25YB 214

STEEL SAFETY TOE

Brown Leather
5-12,13,14,15W

CAPROCK

- Premium high-quality waterproof smooth leather
- Alloy safety toe
- Goodyear Welt Cast-Bond™ construction for a durable mechanical and chemical bond
- Unlined for breathability
- Unique “fingergrip” pull-on feature for ease of entry
- Three-ribbed steel shank for structural support
- Non-Metallic puncture-resistant plate
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control



ALLOY
SAFETY TOE



WATERPROOF
LEATHER



18KV ELECTRICAL
HAZARD



PU OUTSOLE



EVER-GUARD™
LEATHER



ANTIMICROBIAL
ODOR CONTROL



PUNCTURE
RESISTANT



ANTI-FATIGUE
TECHNOLOGY™



TB0 A11T9 214

8" ALLOY SAFETY TOE

Brown Smooth Leather
with Ever-Guard™ Leather
5-12,13,14,15M/W



TB0 1152A 214

ALLOY SAFETY TOE

Brown Smooth Leather
with Ever-Guard™ Leather
5-12,13,14,15M/W

A. Alloy Safety Toe

B. Anti-Fatigue Technology PU Footbed

C. Steel Shank


D. Non-Metallic Puncture-Resistant Plate



E. PU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Features Ladder Lock™ Outsole Radius

ASTM SLIP TEST RATINGS

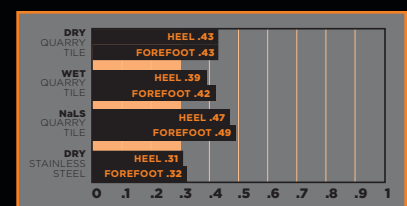

TEST REPORT: CHT0212499/1310

OUTSOLE: PRO166 TEST LAB: 12A10



TRUE GRIT

- Premium full-grain waterproof leather
- Composite safety toe powered by CarbonShield™ technology and soft toe styles
- Goodyear Welt Cast-Bond™ construction for a durable mechanical and chemical bond
- ExoSpine™ technology to provide lasting structure, durability and improved heel fit
- Fiberglass shank for structural support
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control



NEW
7/17/20



TB0 A24DZ 214

COMPOSITE SAFETY TOE

Brown Sable Homerun Leather

5-12,13,14,15M/W


- A. Composite Safety Toe Powered by CarbonShield™ technology**
- B. Anti-Fatigue Technology PU Footbed**
- C. Non-Metallic Shank**
- D. Lightweight, Cushioning PU Midsole**



E. All-Weather TPU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil-resistant sole tested for volume swell using EN345 TMP ASTM fuel A & Diesel ISO 1817 liquid F for 22 hours and ASTM IRM903 & fuel B for 46 hours
- Slip resistant
- Abrasion resistant
- Non-marking

ASTM SLIP TEST RATINGS

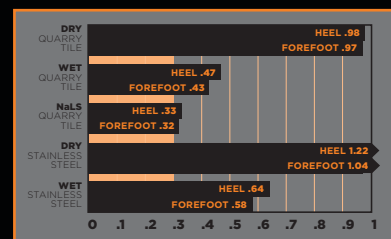

TEST REPORT: CHT0283929/1915

OUTSOLE: PRO558 TEST LAB: 12A10

RIGMASTER

- Premium waterproof leather
- Steel safety toe
- Goodyear Welt Cast-Bond™ construction for a durable mechanical and chemical bond
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Unique “fingerrip” pull-on feature for ease of entry
- Steel shank for structural support
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control



STEEL SAFETY TOE



WATERPROOF MEMBRANE



BLOOD-BORNE PATHOGEN



18KV ELECTRICAL HAZARD



PU OUTSOLE



EVER-GUARD™ LEATHER



ANTIMICROBIAL ODOR CONTROL




ANTI-FATIGUE TECHNOLOGY™

A. Steel Safety Toe

B. Anti-Fatigue Technology PU Footbed

C. Steel Shank

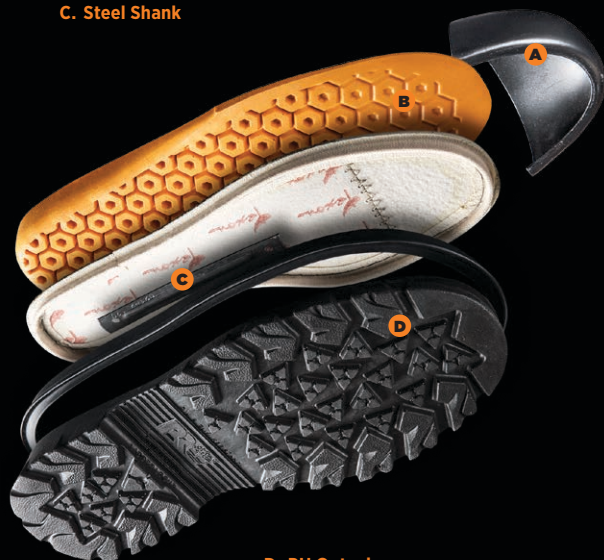

D. PU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Features Ladder Lock™ Outsole Radius




TB0 95553 214

8" STEEL SAFETY TOE WATERPROOF

Brown Full-Grain Leather
with Ever-Guard™ Leather
7-12,13,14,15M/W

ASTM SLIP TEST RATINGS

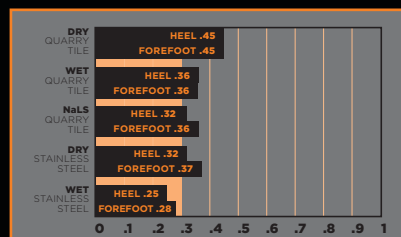

TEST REPORT: CHT0213239/1314

OUTSOLE: PRO175 TEST LAB: 12A10

LACE RIGGER

- Premium waterproof leather and abrasion-resistant Ever-Guard™ leather with waterproof membrane
- Steel safety toe
- Goodyear Welt Cast-Bond™ construction for a mechanical and chemical bond
- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Side zipper with locking pull tab
- Non-metallic puncture-resistant plate
- Padded top collar for comfort
- Steel shank for structural support
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control




TB091665 214

8" STEEL SAFETY TOE WATERPROOF

Bandit Full-Grain
with Ever-Guard™ Leather
7-12,13,14,15M/W


- A. Steel Safety Toe
- B. Anti-Fatigue Technology PU Footbed
- C. Steel Shank
- D. Non-Metallic Puncture-Resistant Plate

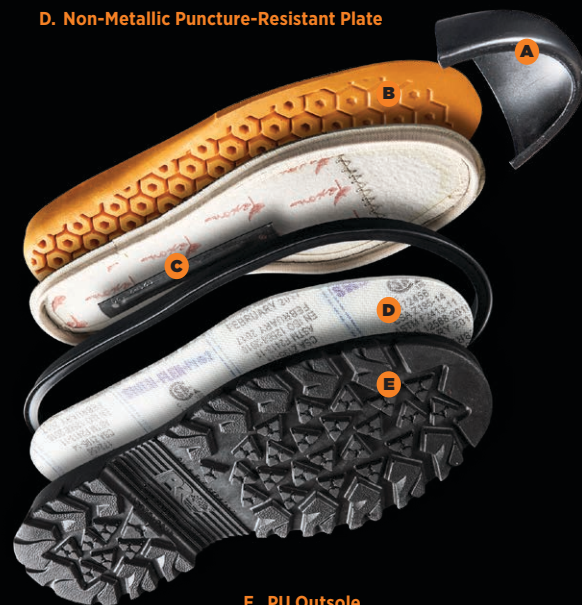

E. PU Outsole

- Heat resistant up to 248°F using EN/ISO 20344:2004 (120°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Features Ladder Lock™ Outsole Radius

ASTM SLIP TEST RATINGS

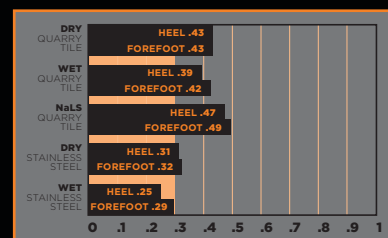

TEST REPORT: CHT0212499/1310
OUTSOLE: PRO166 TEST LAB: 12A10

TIMBERLAND PRO® STABLE STRIDE™ TECHNOLOGY

STEADY ON YOUR FEET.



STABLE STRIDE™ TECHNOLOGY FROM TIMBERLAND PRO® is specifically designed to provide enhanced lateral stability on slanted and uneven surfaces, reducing ankle rolling, slippage, and injury. From steep roofs to rugged job sites, Stable Stride™ Technology keeps you up and on your feet.



TIMBERLAND PRO® INDEPENDENT SUSPENSION NETWORK™

MAKE THE JOB SITE A **LEVEL PLAYING FIELD.**

INDEPENDENT SUSPENSION NETWORK™ FROM TIMBERLAND PRO® To navigate rough terrain and stay balanced, you need trustworthy footwear. As you maneuver over uneven surfaces, Timberland PRO® Independent Suspension Network™ outsole technology is engineered to help mitigate pressure points and level out your stride.



HYPERCHARGE

- Premium full-grain leather with waterproof membrane
- Soft toe
- Cement construction for flexibility
- Stable Stride™ technology stability platform
- Non-metallic puncture plate
- Exclusive Independent Suspension Network™ system for

superior control, support and agility

- Anti-Fatigue Technology polyurethane footbed for shock absorption and energy return
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control



WATERPROOF
MEMBRANE



18KV ELECTRICAL
SHOCK



PUNCTURE
RESISTANT



RUBBER OUTSOLE



ANTIMICROBIAL
ODOR CONTROL



ANTI-FATIGUE
TECHNOLOGY™



INDEPENDENT
SUSPENSION



STABLE STRIDE
TECHNOLOGY



NEW
7/17/20



TB0 A25WF 270

**8" SOFT TOE
WATERPROOF**

Sand Full-Grain Leather
7-11,12,13,14,15W



NEW
7/17/20



TB0 A1XVC 001

**8" SOFT TOE
WATERPROOF**


Black EverGuard™ Leather
3.5-13W/8-16

A. Composite Safety Toe Powered by CarbonShield™ Technology

B. Anti-Fatigue Technology PU Footbed

C. Contoured Shock-Diffusion Plate


D. Lightweight, Cushioning EVA Midsole

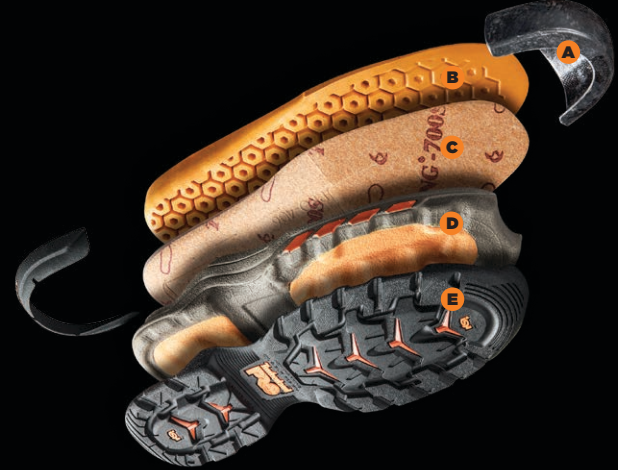

E. Independent Suspension Network™ Technology and Rubber Outsole

- Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Features Ladder Lock™ outsole radius

ASTM SLIP TEST RATINGS

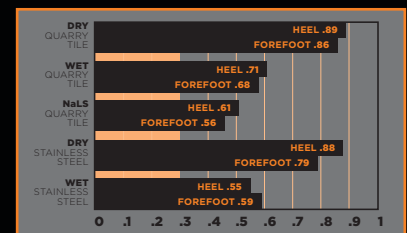

TEST REPORT: CHT0262906/1741

OUTSOLE: PRO447 TEST LAB: 12A10

VALOR™ DUTY

- Premium black smooth leather with 1200D ballistic nylon
- Soft toe
- Premium waterproof leather with waterproof membrane
- Cement construction for flexibility
- Polishable smooth forefoot with textile upper panels for lightweight durability
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control

- Defender Repellent Systems featuring Scotchgard™ Protector by 3M™
- Anti-Fatigue Technology absorbs shock and returns energy at key zones of the foot for all-day comfort



COMPOSITE SAFETY TOE



WATERPROOF MEMBRANE



BLOOD-BORNE PATHOGEN



18KV ELECTRICAL HAZARD



RUBBER OUTSOLE



POLISHABLE



METAL-DETECTOR FRIENDLY




ANTIMICROBIAL ODOR CONTROL



ANTI-FATIGUE TECHNOLOGY™




- A. Composite Safety Toe (1161A, 1165A)
- B. Anti-Fatigue Technology PU Footbed
- C. Non-Metallic Shank
- D. Lightweight, Cushioning EVA Midsole

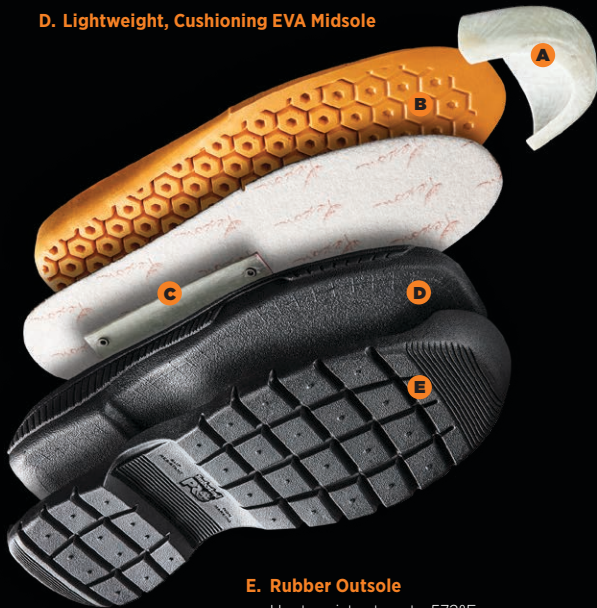

E. Rubber Outsole

- Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking
- Features Ladder Lock™ Outsole Radius
- Rounded driving mock heel
- Prone lugs for stability
- Wall climb toe grip

ASTM SLIP TEST RATINGS

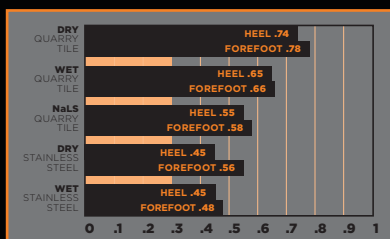

TEST REPORT: CHT0228109/1437
OUTSOLE: PRO379 TEST LAB: 12A10



TB0 1167A 001

8" DUTY SOFT TOE WATERPROOF SIDE-ZIP

Black Smooth Leather w/1200D Ballistic Nylon
3.5-12,13,14,15M/W



TB0 1164A 001

6" DUTY SOFT TOE WATERPROOF SIDE-ZIP

Black Smooth Leather w/1200D Ballistic Nylon
3.5-12,13,14,15M/W

VALOR™ TACTICAL

- Polishable smooth Raptek microfiber with 800D ballistic nylon and smooth leather with mesh styles
- Cement construction for flexibility
- Breathable and moisture-wicking lining with anti-microbial treatment for odor control
- Scotchgard™ protector by 3M® for stain resistance
- Anti-Fatigue Technology for shock absorption and energy return for all-day comfort



18KV ELECTRICAL
HAZARD



METAL-DETECTOR
FRIENDLY



ANTIMICROBIAL
ODOR CONTROL



TB0 92639 001

8" TACTICAL SOFT TOE WATERPROOF SIDE-ZIP

Black Smooth Raptek Microfiber
with 800D Ballistic Poly
3.5-12,13,14,15M/W



TB0 92633 001

5" TACTICAL SOFT TOE WATERPROOF

Black Smooth Raptek Microfiber
with 800D Ballistic Poly
3.5-12,13,14,15M/W

A. Anti-Fatigue Technology PU Footbed

B. Non-Metallic Shank


C. Lightweight, Cushioning EVA Midsole



D. Vibram® Rubber Outsole

- Heat resistant up to 572°F using EN/ISO 20344:2004 (300°C)
- Oil resistant
- Slip resistant
- Abrasion resistant
- Non marking

ASTM SLIP TEST RATINGS

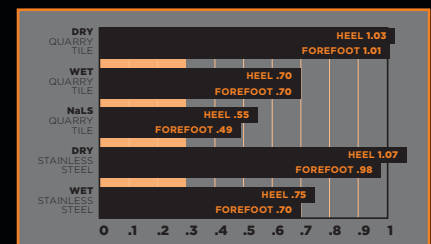

TEST REPORT: CHT0212667/1311

OUTSOLE: OP107 TEST LAB: 12A10

TECHNOLOGY KEY



PU OUTSOLE

POLYURETHANE OUTSOLE

Lightweight and rugged, providing cushioning plus slip, oil and abrasion resistance.



TPU OUTSOLE

THERMOPLASTIC URETHANE OUTSOLE

Lighter weight and more abrasion resistant than polyurethane, providing exceptional cushioning, plus slip, oil and abrasion resistance.



RUBBER OUTSOLE

TIMBERLAND PRO® RUBBER

Heat-resistant, durable rubber compound offers enhanced slip, oil and abrasion resistance.



HEAT RESISTANT OUTSOLE

HEAT-RESISTANT OUTSOLE

Solid Timberland PRO® rubber compound outsole resists hot contact using EN ISO 20344:2004 8.7 testing standard at 572°F to 1000°F.



ALL-WEATHER TPU OUTSOLE

ALL-WEATHER THERMOPLASTIC URETHANE COLD FORMULA

Specially-formulated thermoplastic urethane compound designed to maintain flexibility in variable weather conditions, providing enhanced traction on wet and frosted ice surfaces, plus slip, oil and abrasion resistance.



PUNCTURE RESISTANT

METALLIC PUNCTURE-RESISTANT OUTSOLE

Flexible, steel plate minimizes the likelihood of puncture wounds. Meets US and Canadian safety standards including ASTM F2412-18a, ASTM F2413-18 and ASTM F2892-18 PR puncture resistance and CAN/CSA-Z195-14 Grade 1 with protective soles.



PUNCTURE RESISTANT

NON-METALLIC PUNCTURE-RESISTANT OUTSOLE

Flexible non-metallic plate minimizes the likelihood of puncture wounds. Meets US and Canadian safety standards including ASTM F2412-18a, ASTM F2413-18 and ASTM F2892-18 PR puncture resistance and CAN/CSA-Z195-14 Grade 1 with protective soles.



INDEPENDENT SUSPENSION NETWORK™

INDEPENDENT SUSPENSION NETWORK™ TECHNOLOGY

Multi-density outsole with comfort lugs that act independently of each other and adapt to varying worksite conditions, providing an additional layer of cushioning, comfort and stability.



WATERPROOF MEMBRANE

WATERPROOF MEMBRANE

Delivers maximum waterproof protection and blood-borne pathogen resistance. Meets ASTM F1671-07 safety standard.



WATERPROOF SEAM-SEALED

SEAM-SEALED WATERPROOF

Seam-sealed waterproof leather for durable waterproof protection. Special tanning repels moisture for waterproof protection.



WATERPROOF LEATHER

WATERPROOF LEATHER

Special tanning repels moisture for waterproof protection.



EVER-GUARD™ LEATHER

EVER-GUARD™ LEATHER

Highly abrasion-resistant leather that enhances durability in rugged jobsite conditions.



ANTIMICROBIAL ODOR CONTROL

ANTIMICROBIAL ODOR CONTROL

Treatment to help prevent and control odors.



STEEL SAFETY TOE

STEEL SAFETY TOE

Metallic, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-18a and ASTM F2413-18 I and C impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



COMPOSITE SAFETY TOE

COMPOSITE SAFETY TOE

Lightweight, non-metallic, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-18a and ASTM F2413-18 I and C impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



ALLOY SAFETY TOE

ALLOY SAFETY TOE

Lightweight, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-18a and ASTM F2413-18 I and C impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



ALLOY XL SAFETY TOE

ALLOY XL SAFETY TOE

Roomier, lightweight, asymmetrical-shaped toe cap. Meets US and Canadian safety standards including ASTM F2412-18a and ASTM F2413-18 I and C impact and compression safety standards and CAN/CSA-Z195-14 Grade 1.



METATARSAL GUARD

OPEN CELL MET GUARD

Meets US and Canadian safety standards including ASTM F2412-18a and ASTM F2413-18 Class Mt75 and CAN/CSA-Z195-15 metatarsal impact resistance.



18KV ELECTRICAL HAZARD

ELECTRICAL HAZARD

Provides secondary underfoot protection against live electrical circuits, electrically energized conductors, parts or apparatus. Meets ASTM F2412-18a, ASTM F2413-18 and ASTM F2892-18 standards.



ELECTRO STATIC DISSIPATIVE

ELECTRO STATIC-DISSIPATIVE

Protects against hazards related to excessively low footwear resistance. Meets SD static-dissipative ASTM F2412-18a, ASTM F2413-18 and ASTM F2892-18 safety standards.



METAL FREE

METAL-FREE

Built with materials that should not activate most security systems or scratch surfaces.



METAL-DETECTOR FRIENDLY

METAL-DETECTOR FRIENDLY

All materials and components should not activate most security systems.



BLOOD-BORNE PATHOGEN

BLOOD-BORNE PATHOGEN

Breathable membrane helps protect from diseases caused by blood-borne pathogens.



MUTILATION FREE

MUTILATION FREE UPPER

Nylon, plastic or hidden eyelets reduce the chances of marking or scratching surfaces.



INSULATED

INSULATED

Thermolite®, lightweight, non-quilted, quick-drying, moisture-resistant insulation helps keep feet warm in any weather.

**CSA BLUE PATCH/SD+**

Meets CAN/CSA-Z195-14 safety standards for toe protection and SD+ when tested in accordance with ASTM F2412. Each test specimen shall fall within a range of 106 Ohms to 3.5 x 107 Ohms.

**CSA SD+**

Meets CSA standards for SD+ when tested in accordance with ASTM F2412. Each test specimen shall fall within a range of 106 Ohms to 3.5 x 107 Ohms.

**CANADIAN SAFETY ASSOCIATION**

Meets CAN/CSA-Z195-14 safety standards to provide toe protection, puncture resistance and resistance to electric shock in the sole.

**TIMBERLAND PRO® RAPTEK**

Raptek's non-solvent microfiber upper—with excellent wicking and fast drying properties—keeps feet comfortable and dry in wet conditions. Raptek has superior feel and improved cracking compared to natural leather.

**STEP PROPEL™ ENERGY RETURN TECHNOLOGY**

The Step Repel™ Footbed is designed to store energy and release it back to your feet with every step, through thousands of small, ultra-compressed beads.

**AEROCORE™ ENERGY SYSTEM**

Aerocore™ Energy System delivers lightweight sole design, and opens up new possibilities with high-rebound cushioning and comfort in every step.

**CARBON SHIELD™ TECHNOLOGY**

Engineered with nanotechnology, adds strength and unmatched protection, provides a better fit and reduces weight.

**STABLE STRIDE™ TECHNOLOGY**

Designed to provide lateral stability on slanted and uneven surfaces to help reduce ankle rolling, slippage and injury.

**EXOSPINE™ TECHNOLOGY**

Engineered to provide lasting structure and durability, as well as improved heel fit, to pull-on work boots.

**VIBRAM®**

Outsoles built to withstand the harshest working environments.

**VIBRAM® FIRE & ICE**

Vibram® Fire&ICE™ compound maintains flexibility in freezing temperatures.

**WATERPROOF**

Our waterproof footwear incorporates a variety of advanced waterproofing materials, treatments and processes. We start with waterproof leathers that are sealed as part of the tanning process; we then either seam-seal the footwear or use an internal waterproof breathable membrane to help feet stay dry. Tongues and zippers treated with durable water resistant coatings utilize integrated gussets, to further deter water entry.



SAFETY TOE TYPES



ALLOY SAFETY TOE

- Our lightest-weight toe cap
- Made from a ballistic-grade aluminum alloy for lightweight protection
- Asymmetrical shape for a roomier fit



COMPOSITE SAFETY TOE

- Conducts cold slower than steel in cold environments
- Lightweight for all-day comfort
- Metal free and metal-detector friendly
- Asymmetrical shape for a roomier fit



COMPOSITE SAFETY TOE



- Utilizes single-wall carbon nanotube enhanced resin to help increase mechanical strength and fracture toughness
- Conducts cold slower than steel in cold environment
- Lightweight for all-day comfort
- Asymmetrical shape for a roomier fit
- Metal-free and metal-detector friendly



STEEL SAFETY TOE

- Our thinnest toe cap
- Made of tempered steel and epoxy coated to resist corrosion
- Asymmetrical shape for a roomier fit

FACTORY DIRECT CALENDAR

ORDER DEADLINE	EX-FACTORY DATES			
	BANGLADESH	CHINA	VIETNAM	DOMINICAN REPUBLIC
6/24/19	11/8/19	10/25/19	10/25/19	11/5/19
7/22/19	12/6/19	11/22/19	11/22/19	12/3/19
8/19/19	1/10/20	12/27/19	12/27/19	1/7/20
9/23/19	2/7/20	1/24/20	1/24/20	2/4/20
10/21/19	3/6/20	2/21/20	2/21/20	3/3/20
11/18/19	4/10/20	3/27/20	3/27/20	5/5/20
12/23/19	5/8/20	4/24/20	4/24/20	5/5/20
1/20/20	6/5/20	5/22/20	5/22/20	6/2/20
2/17/20	7/10/20	6/26/20	6/26/20	7/7/20
3/23/20	8/7/20	7/24/20	7/24/20	8/4/20
4/20/20	9/4/20	8/21/20	8/21/20	9/1/20
5/18/20	10/9/20	9/25/20	9/25/20	10/6/20
6/22/20	11/6/20	10/23/20	10/23/20	11/3/20
7/20/20	12/4/20	11/20/20	11/20/20	12/1/20
8/17/20	1/8/21	12/25/20	12/25/20	1/5/21
9/21/20	2/5/21	1/22/21	1/22/21	2/2/21
10/19/20	3/5/21	2/19/21	2/19/21	3/2/21
11/16/20	4/9/21	3/26/21	3/26/21	4/6/21

DISTRIBUTOR CONTACT INFORMATION

Country	Account Name	Address	Contact	Phone	Contact Email
Saudi Arabia	Reda Trading & Development Co.	P.O. Box 2923 Khobar-Dammam Highway Next to Saudi Airlines Building. Al Khobar Kingdom of Saudi Arabia 31952	Yassin Kret	0096613 8570079	Yassin.kret@redafire.com
	Litwin Saudi Arabia	P.O. Box 3739, Al Khobar 31952 Kingdom of Saudi Arabia	Ashok Kumar	00966 13 893 8557	ashok@litwinksa.com
Qatar	BIEWU International	PO Box 24534, Building #19, Office #3, Najma 26 Al Khalidiya Street, Doha, Qatar	Riaz Adam	00974 44354768	Riaz@biewuinternational.com
Kuwait	Raja Restaurant and Construction Materials Company	P.O. Box: 4121, Safat 13042, State Of Kuwait	Balaji	0096 524844696	sales@safetyplusworld.com
Oman	Al Khalili United Enterprises LLC	P.O. Box 1869 , Postal Code 112 Ruwi, Oman	Mr. Kiran	0096 822035000	salesog@alkhalili.com
Algeria	Algerian Business Center	Cite 442 Logements BP 232. Hassi Messaoud, W- Ouargla, Algeria	Amina Sadok	+213 29 75 5700	abc_safety@yahoo.com
Libya	Grayford Industrial Ltd.	Unit 8 Lion Centre, Hamworth Trading Estate, Hampton Road West, Feltham, Middlesex TW13 6DS United Kingdom, Territory: Libya	Jason Welby	+44 (0)208 8946633	jason.welby@grayfordindustrial.com
	Alshoulah Almonerah Oil Services	Vensai Street, Benghazi, Libya	Idris Kadiki	+218 92 7286070	i.kadiki@soscofze.com
	Magnum International	Magnum Ventures Ltd. 16 Herbert Place, Dublin, Ireland. Territory: Libya	David Breen	+353 86 2432444	david@magnuminternational.ie
Kazakhstan	Borkit Safety LLP	76b Azattyk Avenue Atyrau, Kazakhstan	Sergey Derevyanko	+7 (7122) 457190	sales@borkitsafety.com
Egypt	Mechanical Tools Co.	62 Goumhoria St., Downtown Cairo Egypt C.P. 11111	Mohamed Eid	+(202) 25915955	info@mechanical-tools.com
Yemen	ReMax Trading & Services	10 Alsteen Road PO BOX 3851, Sana'a, Sana'a. Yemen	Adel Alajji	009671-450715	info@remaxtrading.com
MENA Regional Distributor	Distribution NOW FZE	PO Box 263176 Plot S61202 Jebel Ali Free Zone South, Dubai, UAE	Mohit Jham	00971 48891248	Mohit.Jham@dnw.com

PAGE INDEX

TB0 1152A 214	Caprock Alloy Safety Toe	25	TB0 A1XKI 214	Bosshog 6" Composite Safety Toe Waterproof	19
TB0 1164A 001	Valor™ Duty 6" Soft Toe Waterproof Side-Zip	32	TB0 A1WSB 214	Bosshog 6" Composite Safety Toe Waterproof	19
TB0 1167A 001	Valor™ Duty 8" Soft Toe Waterproof Side-Zip	32	TB0 A1XVC 001	Hypercharge 8" Soft Toe Waterproof.	31
TB0 39077 210	Rachet Steel Safety Toe	17	TB0 A21R8 001	Reaxion Composite Safety Toe Waterproof	14
TB0 85590 214	Gladstone Steel Safety Toe ESD	11	TB0 A21T4 001	Reaxion Composite Safety Toe SD+	13
TB0 86509 214	Gladstone Steel Safety Toe ESD	11	TB0 A21TQ 001	Reaxion Composite Safety Toe SD+	13
TB0 87520 214	Magnus 6" Steel Safety Toe	24	TB0 A21W2 001	Drivetrain Composite Safety Toe ESD	15
TB0 89646 214	Boondock 8" Composite Safety Toe Waterproof Insulated.	23	TB0 A21WC 001	Drivetrain Composite Safety Toe ESD	15
TB0 91665 214	Lace Rigger 8" Steel Safety Toe Waterproof.	29	TB0 A21WK 001	Drivetrain Composite Safety Toe.	8
TB0 92633 001	Valor™ Tactical 5" Soft Toe Waterproof.	33	TB0 A21X7 214	Drivetrain Composite Safety Toe.	8
TB0 92639 001	Valor™ Tactical 8" Soft Toe Waterproof Side-Zip.	33	TB0 A21XT 001	Drivetrain Composite Safety Toe.	8
TB0 92647 001	Branston Alloy Safety Toe Moc Toe Slip-On ESD.	10	TB0 A22WR 001	Gladstone Steel Safety Toe ESD	11
TB0 95553 214	Rigmaster 8" Steel Safety Toe Waterproof	28	TB0 A24DZ 214	True Grit Composite Safety Toe.	27
TB0 A11T9 214	Caprock 8" Alloy Safety Toe.	25	TB0 A24G7 001	Work Summit 6" Composite Safety Toe Waterproof	21
TB0 A11WP 001	Branston Alloy Safety Toe Oxford ESD	10	TB0 A24H5 001	Work Summit 8" Composite Safety Toe Waterproof Insulated	21
TB0 A11XC 001	Branston Alloy Safety Toe Moc Toe Slip-On ESD.	10	TB0 A25DK 214	Work Summit 6" Composite Safety Toe Waterproof	21
TB0 A131D 001	Boondock 8" Composite Safety Toe Waterproof Insulated.	23	TB0 A25WF 270	Hypercharge 8" Soft Toe Waterproof.	31
TB0 A1GQQ 001	Wildcard Composite Safety Toe	16	TB0 A25YB 214	Magnus Steel Safety Toe.	24
TB0 A1GSW 001	Wildcard Composite Safety Toe	16	TB0 A25YM 214	Magnus 8" Steel Safety Toe	24
TB0 A1XJP 001	Bosshog 6" Composite Safety Toe Waterproof	19			

MIDDLE EAST / AFRICA / CASPIAN REGIONS

MUHAMMAD KHURRAM - SALES MANAGER

WORK: +971 4 8878283

MOBILE: +971 56 4945464

MUHAMMAD_KHURRAM@VFC.COM

MAGNOLIA ZACARIAS - SALES/MARKETING SUPPORT

WORK: +971 4 887 8223

MAGNOLIA_ZACARIASCAMBA@VFC.COM

TIMBERLAND PRO - ENERGY DIVISION, INTERNATIONAL

JAFZA VIEW TOWER 18,

OFFICES 1101-1102

JEBEL ALI, DUBAI, UAE




TIMBERLAND PRO

200 Domain Drive

Stratham, NH 03885

CUSTOMER SERVICE:

1-855-253-3261

Timberland, , Timberland PRO, the PRO logo, ISN, the ISN logo, Independent Suspension Network, PowerFit, Titan, 24/7 Comfort Suspension, PRO 24/7 Comfort Suspension, the PRO 24/7 Comfort Suspension logo, Valor, Cast-Bond, Ever-Guard, The Anti-Fatigue Technology logo, Ladder Lock, SafeGrip, Rapterk, Smart Comfort, WickWork, CarbonShield, Stable Stride, StepVent, SmartHinge, Exospine, RainRepel, the RainRepel logo, RainProof, the RainProof logo, StepPropel, the StepPropel logo, ReBOTL, the ReBOTL logo and Sensorflex are trademarks of TBL Licensing LLC. Outlast is a trademark of Outlast Technologies, Inc. 3M, Scotchlite, and Scotchgard are trademarks of 3M. Kevlar is a trademark of E.I. du Pont de Nemours and Company. Thermolite is a trademark of Invista North America S.A.R.L. Goodyear (and Winged Foot design) is a trademark of The Goodyear Tire & Rubber Company used under license by Fitday Enterprise Ltd. Vibram, Fire&Ice, Arctic Grip and the yellow octagonal label are trademarks of Vibram S.p.A. Skydex is a trademark and brand of Skydex Technologies, Inc. OrthoLite is a trademark of O2 Partners LLC. BASF is a trademark of BASF SE. Agion is a trademark of Agion Technologies, LLC. FCX Technology is a trademark of FCX Global, Inc. All other trademarks are the property of their respective owners. © 2019 TBL Licensing LLC. All rights reserved. PRO141

Descriptive, typographic, photographic, pricing errors are subject to correction and Timberland shall have no liability of any kind for such errors.